



Bettalux - Front Flush

PRODUCT CODES

WHITE SUITE:	XTBX08A	SUITE-B/LUX FF-WHI(INCL SEAT)
COLOUR SUITE:	XTBX**A	SUITE-B/LUX FF-**(INCL SEAT)
CISTERN:	CB01**A	CISTERN-B/LUX TF-WHI
PAN:	TA01**A	PANS-ASTRA-**
SEAT:	STBE0D08	SEAT-BETTALUX WHITE (PLASTIC)
MECH:	FMFFBW01	MECH-UNIVERSAL FRONT FLUSH (WIRQ)
FIXATION:	FXPAN001	FIX-PAN FIXATIONS (BOLTS&PLUGS)


CLOSE COUPLE, OPEN RIM, FRONT FLUSH

WEIGHT OF PAN:	15.9 kg
WEIGHT OF CISTERN:	11.1 kg
CISTERN WATER CAPACITY:	8.5 Lt
PAN FLUSH VOLUME:	3 Lt / 6 Lt
PAN WIDTH:	360 mm
PAN HEIGHT:	405 mm
CISTERN WIDTH:	402 mm
CISTERN HEIGHT:	355 mm
COMBINED HEIGHT:	810 mm
INSTALLED MAX LENGTH:	695 mm

Bettalux Front Flush is a close-couple, open rim suite.

BETTALUX SUITE INSTALLATION GUIDE:

1. Fit inlet valve and flushing mechanism, as per manufacturer's instructions.
2. Attach cistern to pan using fixation bolts.
3. Fit seat, use the manufacturer's instructions.
4. Place the pan with cistern on flat (even) surface for best results.
5. Make markings on floor surface, for drilling of fixation holes (pan).
6. Remove pan and cistern, drill holes into concrete floor.
7. Slide outlet of pan onto bung of outlet pipe fitted by a qualified plumber.
8. Attach pan to floor using screw fixations.
9. Connect to the water supply.

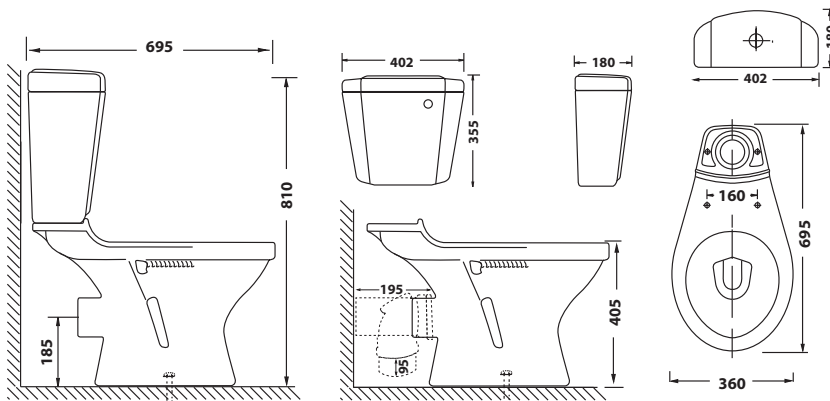

AVAILABLE COLOURS:



PALLET QUANTITIES

CODE	WHITE	COLOUR
XTBX**A	9	6
CB01**A	36	36
TA01**A	18	18
STBE0D08	1	1
FMFFBW01	1	X

