



CONSTRUCTION BOARDS



ITALIAN SHOWERS



MOSAICS



U-Tile DATASHEET

SMOOTH SOLID SURFACE

DESIGNER SHOWERTRAY
CHANNEL OUTLET
&
Wall Panels

SMOOTH SOLID SURFACE SHOWERTRAY

Smooth Solid Surface showertray with integrated waterproof mat - Colour – 9010



Smooth Solid Surface showertray with Cladding Panel



The U-Tile Smooth Solid Surface showertray consists of a cellular glass core with 4mm SMOOTH PURE WHITE SOLID SURFACE covering. The edges are covered with an epoxy resin of the same colour to offer a solid appearance.

This combination allows the showertray to be very light weight for installation, but above all to have a designer anti-bacterial, mat surface finish, without joints. The technology also allows the product to have excellent expansion and contraction characteristics and insulation properties, which gives it a 10-year guarantee*. The product is available in a single mat white colour. This colour is highly sought after because it combines with all the colours in bathroom and brightens dimly lit rooms

A refined High-End Solution



9010
WHITE SMOOTH

* Detail of the 10-year guarantee: Covers dimensional problems (eg: deformation, mechanical resistance) or functional problems (eg: regularity of slopes) provided that the installation instructions have been observed. The warranty excludes problems related to the wear of the products (eg: scratches, impact)

SMOOTH SOLID SURFACE SHOWERTRAY



References and Dimensions

REF	DESCRIPTION	FORMAT	TRAY			DISPLACEMENT (MM)	WEIGHT (KG)	POSITION OF TRAP
			LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)			
RC 90 SOLID	SOLID SURFACE 900 X 900 SHOWERTRAY WITH ULTRA-LOW-PROFILE TRAP	RECTANGULAR BATH FORMAT TRAP	900	900	30	88	18	450/135
RC 100 SOLID	SOLID SURFACE 1000 X 1000 SHOWERTRAY WITH ULTRA-LOW-PROFILE TRAP		1000	1000	30	88	24	500/135
RC 12090 SOLID	SOLID SURFACE 1200 X 900 SHOWERTRAY WITH ULTRA-LOW-PROFILE TRAP		1200	900	30	88	26	450/135
RC 14090 SOLID	SOLID SURFACE 1400 X 900 SHOWERTRAY WITH ULTRA-LOW-PROFILE TRAP		1400	900	30	88	30	450/135
RC 150100 SOLID	SOLID SURFACE 1500 X 1000 SHOWERTRAY WITH ULTRA-LOW-PROFILE TRAP		1500	1000	35	93	37	500/135
RC 18590 SOLID	SOLID SURFACE 1850 X 900 SHOWERTRAY WITH ULTRA-LOW-PROFILE TRAP		1850	900	35	93	45	450/135

SOLIDBOARD200/100-9010	SOLID BOARD 9010 200/100 DESIGNER WALL PANEL WITH INTEGRATED WATERPROOF MAT	2000	1000	10		15	
SOLIDBOARD250/100-9010	SOLID BOARD 9010 250/100 DESIGNER WALL PANEL WITH INTEGRATED WATERPROOF MAT	2500	1000	10		20	

Technical Characteristics

DESCRIPTION	TECHNICAL CHARACTERISTICS
Weight	25 KG / m ²
Chemical Resistance	All Household Products
Abrasion Resistance	Avoid abrasive products
Product Guarantee	10 Years
Product Maintenance	Supple Brush and soft sponge
Grid Size	700 x 70mm
Grid Finish	Solid Surface
Outlet Diameter	40mm
Trap Displacement	58mm
Total Displacement	88 – 93 mm
Waterproofing	Integrated waterproof mat with 10 cm flap

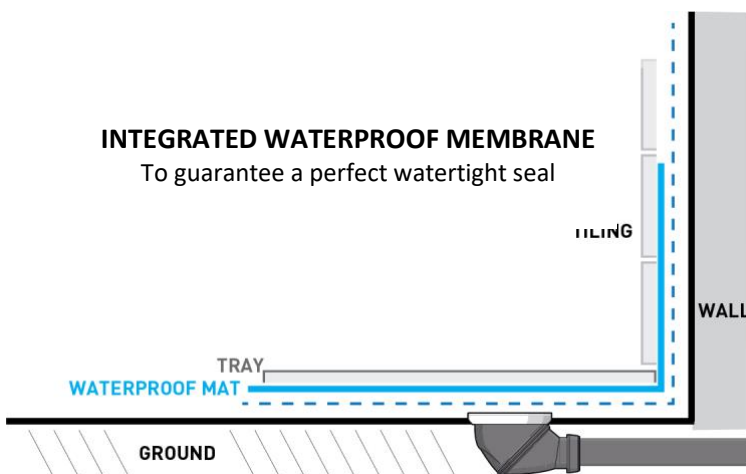

Installation on feet or studs not recommended. Recommended installation: Install on polystyrene or screed. Provide a strong peripheral platform