










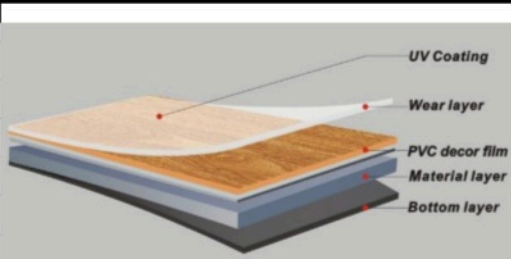










Luxury Vinyl Flooring Specification

Product Information

Type	LVT
Dimension	236*1520mm
Thickness	2.5 mm
Wearlayer	0.55mm
Embossing	BP-R
Package	10pcs/ctn,56ctns/pallet,21pallets/20'GP
Guarantee *	
Residential Area	25 years
Light Commercial	10 years



Technical Information

	Property	Test Method Standard	Review in accordance with Standard
	Class 32 General commercial areas	ISO 10874	restaurant, office,schools,obbies etc.
	Class 41 Moderate light industrial areas	ISO 10874	storerooms, workshops etc.
	Wear Resistance	EN 660-2	Group T
	Castor chair	EN ISO 4918	No visible change
	Reaction to fire	EN 13501-1	Bfl - s1
	Slip resistance	DIN 51130	R 9
	Slip resistance	EN 13893	DS
	Light stability	ISO 105-B02	≥Grade 6
	Residual indentation	ISO 24343-1	≤0,1mm
	Determination of resistance to stains chemical resistance	ISO26987	Not affected
	Thermal conductivity&Thermal resistance	EN 12667	0.051W/(m ² *k) &0.039 (m ² *k) /W
	Electrical propensity	EN 1815	<2 kv
	Formaldehyde emission	EN 717-1	Class E1
	Dimensional stability and curling after exposure to heat	EN ISO 23999	≤0.15%
	Curling	EN ISO 23999	0.5mm
	Certificates	  	CE,FLOORSCORE,GREENTAG