


Rigid Vinyl Flooring Specification







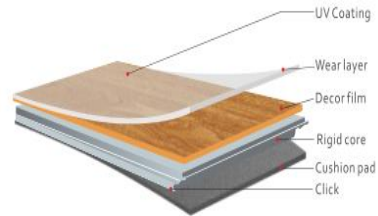




Product Information

Type	SPC(RIGID VINYL FLOORING)
Dimension	229*1220mm
Thickness	6.0 mm(5.0MMSPC+1.0MMIXPE)
Wearlayer	0.5mm
Embossing	BP-R
Package	8pcs/ctn,55ctns/pallet,20pallets/20'GP
Guarantee *	
Residential Area	20 years
Light Commercial	10 years

Rigid vinyl Structure



Technical Information

	Property	Test Method Standard	Review in accordance with Standard
	Class 32 General commercial areas	ISO 10874	restaurant, office,schools,lobbies
	Class 41 Moderate light industrial areas	ISO 10874	storerooms, workshops
	Wear Resistance	EN 660-2	Group T
	Reaction to fire	EN 13501-1	Bfl - s1
	Slip resistance	DIN 51130	R 9
	Slip resistance	EN 13893	DS
	Light stability	ISO 105-B02	≥ 6
	Residual indentation	ISO 24343-1	~ 0,03 mm
	Determination of resistance to stains chemical resistance	ISO26987	Not affected
	Thermal conductivity&Thermal resistance	EN 12667	0.105W/(m*k)&0.039(m2*K) / W
	Electrical propensity	EN 1815	<2 kv
	Effect of a castor chair	ISO4918	NO visible damage
	Dimensional stability and curling after exposure to heat	ISO23999	Dimensional stability: 0.08%(80℃) Curling: ≤1mm(80℃)