

ShowerSelect S

Thermostat for concealed installation for 2 functions

Finish: Polished Gold Optic Article Number: 15743990



Description

product features

- 2 functions
- simultaneous use of several outlets
- Select push-button on/off control for 2 outlets
- thermostat cartridge, Start/stop valve to operate the functions
- flow rate upper outlet: 25 l/min
- flow rate lower outlet: 23 l/min
- flow rate by simultaneous use of all outlets: 29,7 l/min
- maximum flow rate at 3 bar: 29,7 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- Safety stop at 40 °C
- temperature limitation adjustable
- connection type: basic set
- thermostat is delivered with buttons hand shower and Rain large

Technology




Design awards



Product image



Scale drawing

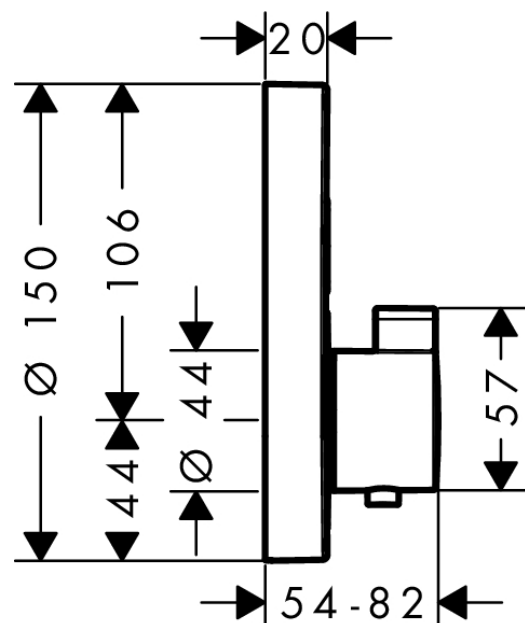


ShowerSelect S

Thermostat for concealed installation for 2 functions

Finish: **Polished Gold Optic** Article Number: **15743990**



Flowchart

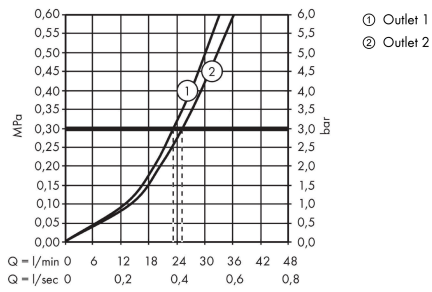

The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.