


Electronic actuator plate for WC A2 # WD5003012000

| < 230 mm > |

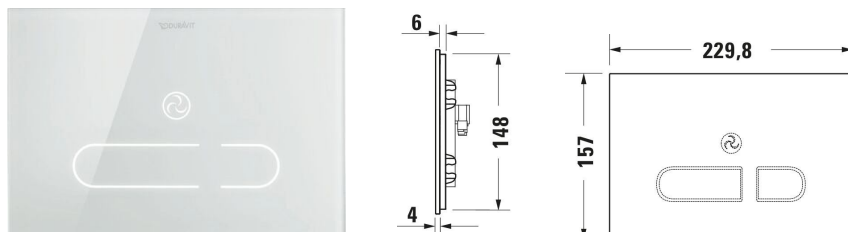

Electronic actuator plate for WC A2	Dimension	Weight	Order number
power supply, Glass, White, Dual Flush, Flush operation: Infra-red controlled, Flush operation technology: Automatic, Touchless, Manual, At the touch of a button, Type of installation: surface mounted, Incl. installation frame, Including mounting kit, Protection type: IPX4			
Colors 00 White Alpin			
Variant	230x157 mm	2.100 kg	WD5003012000
Suitable products			
Installation element dry installation for WC Hygienic flush, 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height with feet: 240 mm, Flush operation: Electronic, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l	500 x 155 mm	16 kg	WD1013
Installation element dry installation for WC Odour extraction, Fan activation: Automatic, Manual, At the touch of a button, Touchless, Hygienic flush, 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height with feet: 240 mm, Flush operation: Electronic, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l	500 x 155 mm	17.5 kg	WD1014
Suitable products			

Electronic actuator plate for WC A2 # WD5003012000

|< 230 mm >|

Compact shower toilet Plus Wall-mounted, Flush construction: Washdown model, Flushing rim: Rimless, HygieneGlaze, Rearwash, Ladywash, Pulsing shower spray: Oscillating, Adjustable shower jet position level: Infinitely adjustable, Controllable warm air dryer steps: Infinitely adjustable, Seat temperature level: Infinitely adjustable, Controllable spray jet temperature steps: Infinitely adjustable, Self-cleaning shower nozzle/shower head, Decalcification function, Holiday mode, Night light, 378 x 575 mm	378 x 575 mm	650000
Compact shower toilet Lite Wall-mounted, Flush construction: Washdown model, Flushing rim: Rimless, HygieneGlaze, Rearwash, Ladywash, Pulsing shower spray: Oscillating, Adjustable shower jet position level: Infinitely adjustable, Controllable warm air dryer steps: Infinitely adjustable, Seat temperature level: Infinitely adjustable, Controllable spray jet temperature steps: Infinitely adjustable, Self-cleaning shower nozzle/shower head, Decalcification function, Holiday mode, Night light, 378 x 575 mm	378 x 575 mm	650001

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.